

TRUCK ROLL-OFF RAMP



Wastequip brand truck ramps make it easy for trucks to empty into sludge and dewatering containers.


60,000 lb. model shown. Specifications below are for 100,000 lb. model

Features & Benefits

- Outside rail understructure
- Spring assisted fold-up ramps
- 43" grade lift
- Rated at 100,000 lbs. maximum capacity
- Outer rails 5" x 3" x 1/4" tubing
- Rear wheel bumper
- Painted any standard Wastequip color (see reverse)
- 20' of cat walk standard
- Tire guides
- Long sills 5" x 2" x 1/4" tubing
- Gussets on long sills & outer rails


Options:

- Side mounted fold-down catwalks (over 20')
- Pinned rear outriggers for stability on uneven surfaces

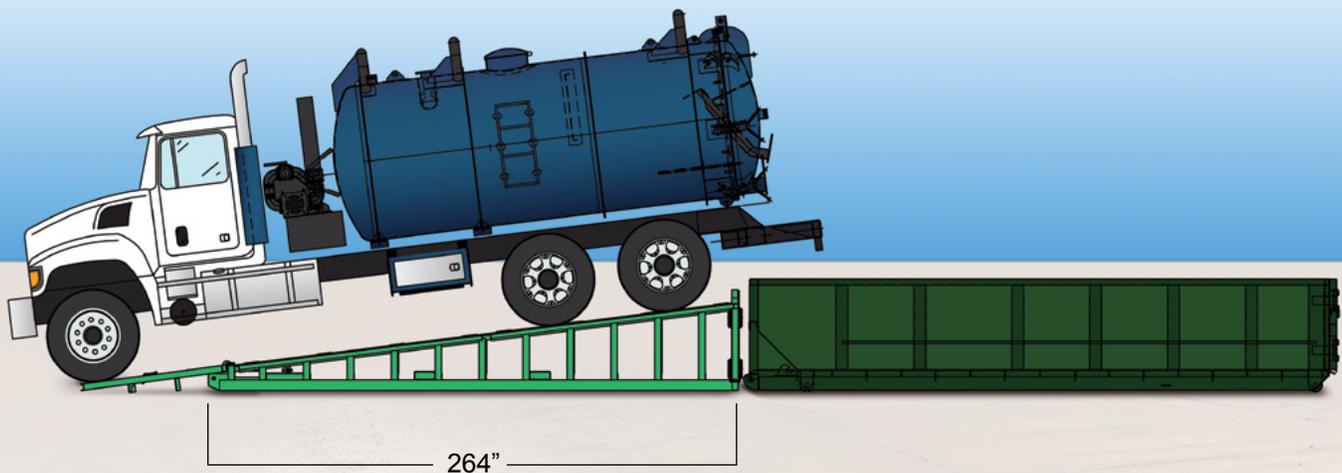

TRUCK ROLL-OFF RAMP

Use the drawing below to enter your truck's dimensions

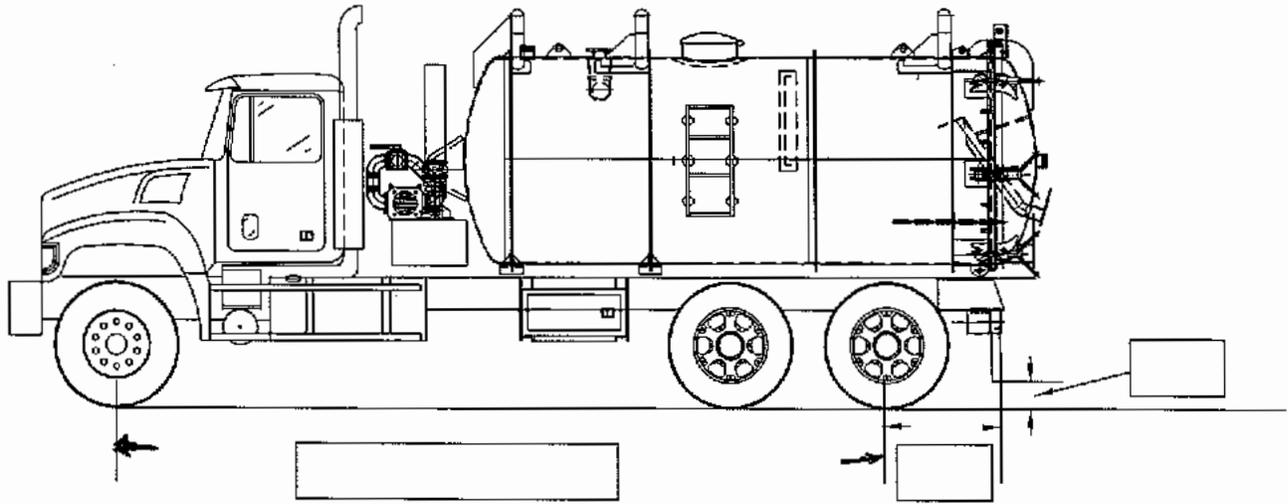

Standard Color Choices



Colors shown are as accurate as printing allows. The actual color is subject to variation from the printed color sample. Color choices vary by plant location. Please contact your local sales representative for available colors. Custom colors are available upon request and are subject to an additional charge.



Tel: 877.468.9278 | sales@wastequip.com | www.wastequip.com

Wastequip is the leading North American manufacturer of waste and recycling equipment for collecting, processing, and transporting recyclables and solid or liquid waste. ©Wastequip. All rights reserved. Specifications subject to improvement without notice. Equipment displayed should be operated by properly trained personnel. Operators should become familiar with OSHA, ANSI, and any other applicable standards or laws for using this equipment. Improper use, misuse, or lack of maintenance could cause injury to people and/or property. Photos used in the literature are illustrative only. We assume no liability or responsibility for proper training/operation of equipment not manufactured by Wastequip. We reserve the right to make changes at any time without notice. Information contained within this literature is intended to be the most accurate available at time of printing.